




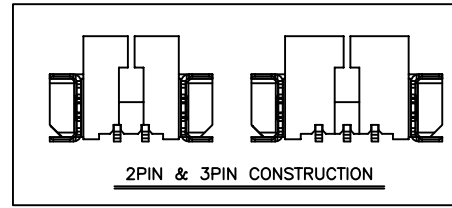
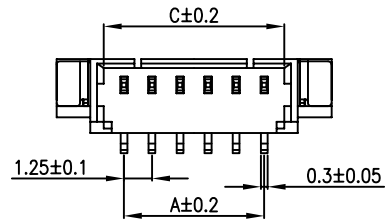
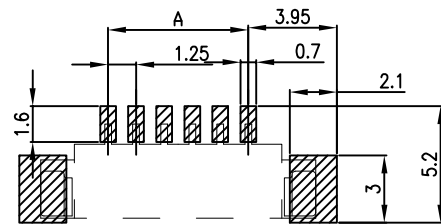


REV	ECN No.	DESCRIPTION	DATE
A	EC-21111101	RELEASE	2021.11.11

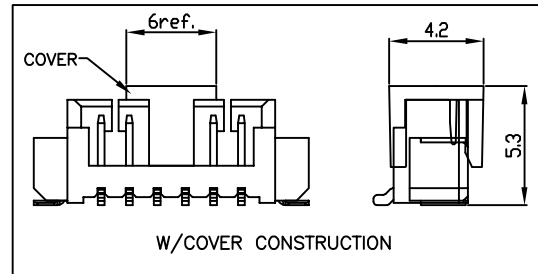

PIN	A	B	C
02	1.25	7.25	3.05
03	2.50	8.50	4.30
04	3.75	9.75	5.55
05	5.00	11.00	6.80
06	6.25	12.25	8.05
07	7.50	13.50	9.30
08	8.75	14.75	10.55
09	10.00	16.00	11.80
10	11.25	17.25	13.05
11	12.50	18.50	14.30
12	13.75	19.75	15.55
13	15.00	21.00	16.80
14	16.25	22.25	18.05
15	17.50	23.50	19.30
16	18.75	24.75	20.55

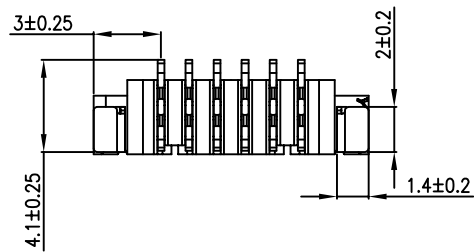

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

序号	名称	数量
1	基座	1
2	阳接触针	n
3	焊片	2
3	COVER	1

说明:

- 产品表面清洁, 无锈蚀、氧化、裂纹、缺芯、毛刺、及其它机械损伤;
- 塑胶材料: H-TEMP PLASTIC 颜色: 本色;
- 金属材料: 黄铜, 镀锡;

 温州瀚精电子有限公司 WENZHOU HANJING ELECTRONIC CO., LTD.				NAME(INTENDED USE) CUSTOMER DRAWING				
APPROVALS		DATE	TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO.:			
DR: Z.S		2021.11.11	X.±0.30 .X±0.25 .XX±0.20	X.±5° .X±3° .XX±1°	1. 25立贴开口			
CHKD: /					DESCRIPTION:			
APPD: Z.X.LI		2021.11.11						
COPYRIGHT OF THIS DOCUMENT AND BUSINESS SECRETS CONTAINED HEREIN ARE PROPERTY OF OUR COMPANY. NO DUPLICATION IS ALLOWED WITHOUT PRIOR APPROVAL					SIZE	UNITS	SCALE	SHEET
					A4	mm	1:1	1/1