


规格书

间距(space) : 1.5mm

公差: ± 0.1

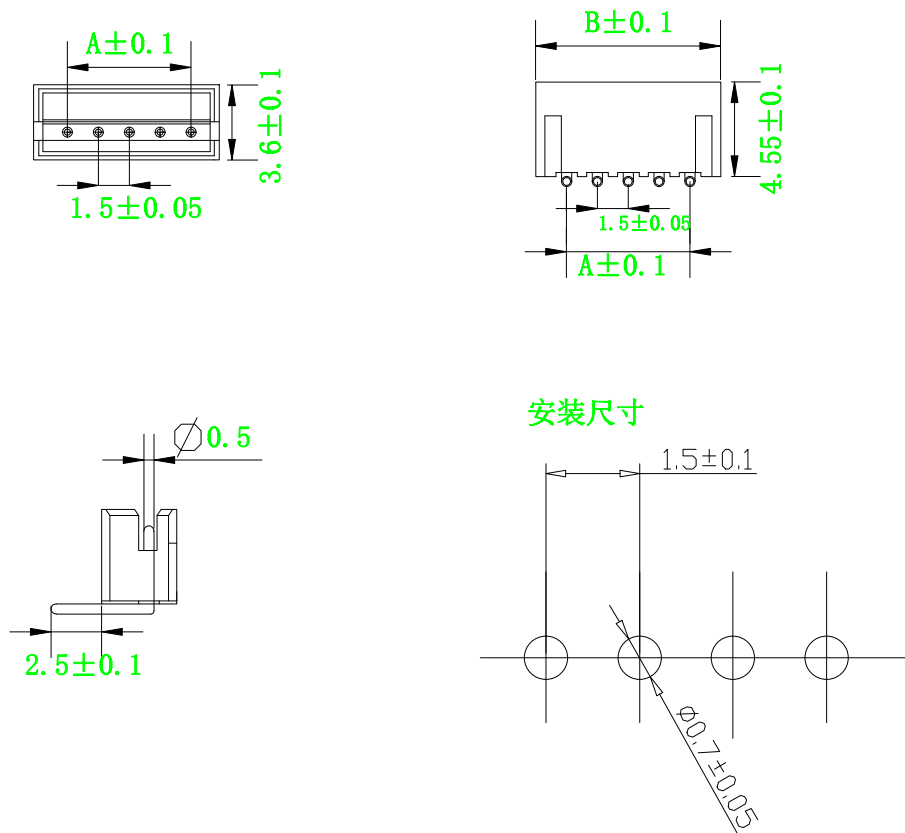

技术参数 SPECIFICATIONS

使用温度范围 (Ambient temperature Range): $-25^{\circ}\sim+85^{\circ}$

适用基板厚度 Applicable PCboard thickness): $0.8\text{mm}\sim 1.6\text{mm}$

额定电压 (Voltage rating): 50V AC,DC

额定电流 (Current rating): 1A

接触电阻 Contact Resistance): $<0.02\Omega$

绝缘电阻 (Insulation Resistance): $>500\text{M}\Omega$

耐压 (Withstand Voltage): 500V/1min

材料 (Material)

1. 基座: PA66 UL94V-2(0)

2. 插针: 黄铜

孔位	尺寸(mm)	
	A	B
2	1.5	4.5
3	3.0	6.0
4	4.5	7.5
5	6.0	9.0
6	7.5	10.5
7	9.0	12.0
8	10.5	13.5
9	12.0	15.0
10	13.5	16.5
11	15.0	18.0
12	16.5	19.5
13	18.0	21.0
14	19.5	22.5
15	21.0	24.0
16	22.5	25.5

产品名称

重量比例

ZH-2AW~16AW



温州瀚精电子有限公司

WENZHOU HANJING ELECTRONIC CO., LTD.

工 艺

日 期

2022. 6. 1

共 1 页

第 1 页