
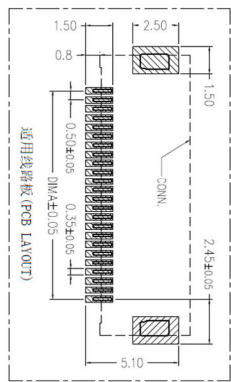
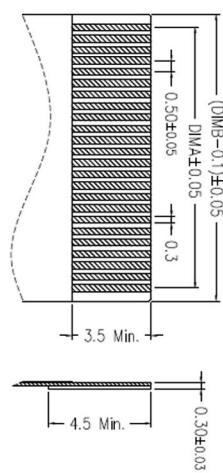
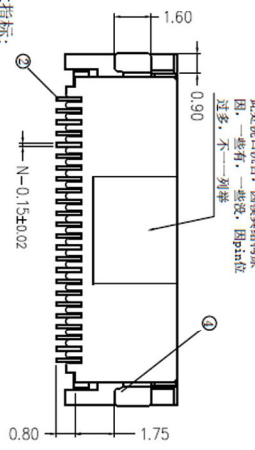
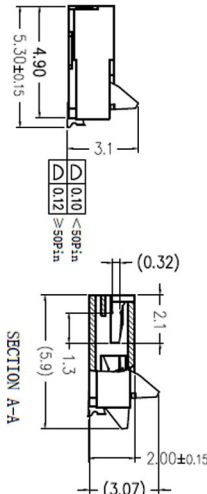
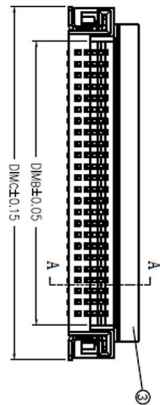
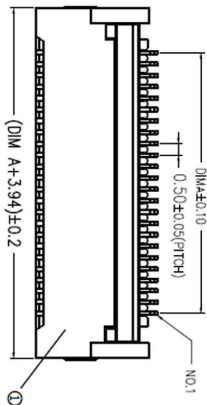


A	DIM A				DIM B				DIM C			
	DIM A	DIM B	DIM C	DIM A	DIM B	DIM C	DIM A	DIM B	DIM C	DIM A	DIM B	DIM C
B	4	1.50	2.52	5.54	33	16.00	17.02	20.04				
	5	2.00	3.02	6.04	34	16.50	17.52	20.54				
C	6	2.50	3.52	6.54	35	17.00	18.02	21.04				
	7	3.00	4.02	7.04	36	17.50	18.52	21.54				
D	8	3.50	4.52	7.54	37	18.00	19.02	22.04				
	9	4.00	5.02	8.04	38	18.50	19.52	22.54				
E	10	4.50	5.52	8.54	39	19.00	20.02	23.04				
	11	5.00	6.02	9.04	40	19.50	20.52	23.54				
F	12	5.50	6.52	9.54	41	20.00	21.02	24.04				
	13	6.00	7.02	10.04	42	20.50	21.52	24.54				
G	14	6.50	7.52	10.54	43	21.00	22.02	25.04				
	15	7.00	8.02	11.04	44	21.50	22.52	25.54				
H	16	7.50	8.52	11.54	45	22.00	23.02	26.04				
	17	8.00	9.02	12.04	46	22.50	23.52	26.54				
I	18	8.50	9.52	12.54	47	23.00	24.02	27.04				
	19	9.00	10.02	13.04	48	23.50	24.52	27.54				
J	20	9.50	10.52	13.54	49	24.00	25.02	28.04				
	21	10.00	11.02	14.04	50	24.50	25.52	28.54				
K	22	10.50	11.52	14.54	51	25.00	26.02	29.04				
	23	11.00	12.02	15.04	52	25.50	26.52	29.54				
L	24	11.50	12.52	15.54	53	26.00	27.02	30.04				
	25	12.00	13.02	16.04	54	26.50	27.52	30.54				
M	26	12.50	13.52	16.54	55	27.00	28.02	31.04				
	27	13.00	14.02	17.04	56	27.50	28.52	31.54				
N	28	13.50	14.52	17.54	57	28.00	29.02	32.04				
	29	14.00	15.02	18.04	58	28.50	29.52	32.54				
O	30	14.50	15.52	18.54	59	29.00	30.02	33.04				
	31	15.00	16.02	19.04	60	29.50	30.52	33.54				
P	32	15.50	16.52	19.54	61	30.00	31.02	34.04				
	33	16.00	17.02	20.04	62	30.50	31.52	34.54				



技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): -25° C~+85° C.
3. 额定电压 (Rated voltage): 50V, AC/DC(等效).
4. 接触电阻 (Contact resistance): ≤0.03Ω.
5. 绝缘电阻 (Insulation resistance): ≥500MΩ
6. 产品料号 (Product material No.):

技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage defects, cracks and other phenomena.)

序号 (NO.)	品名 (Name)	材质 (Material)	第一视角	比例	规格型号/ Part No	物料号/ Part No
①	O.5 PTH Backflip Type Housing (H=2.0)	LCP UL94V-0, 4-6G, Natural	一般公差	1:1	0.5-H2.0后压卧式	TS-Q002***
②	O.5 PTH Backflip Type Terminal (H=2.0)	铜合金/表面镀金	>0.5-2	±0.1		
③	O.5 PTH Backflip Type Actuator (H=2.0)	铜合金/表面镀金	>2-5	±0.2		
④	O.5 PTH Backflip Type Fitting Nail (H=2.0)	LCP UL94V-0, 4-6G, Natural	>5以上	±0.3		

设计/Designed	审核/Checked	批准/Approved	比例	规格型号/ Part No	物料号/ Part No
吴永余	吴东升	何春林	1:1	0.5-H2.0后压卧式	TS-Q002***