
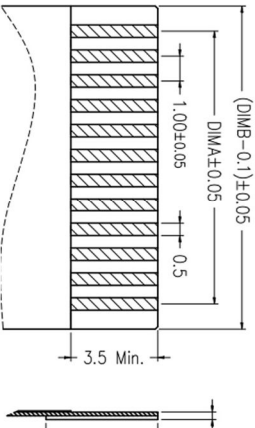

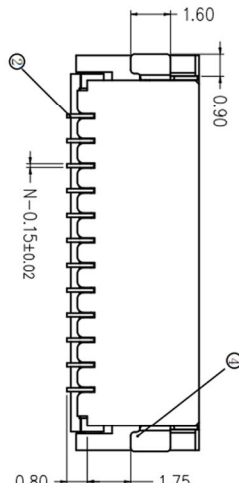
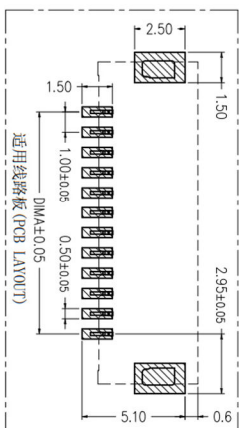

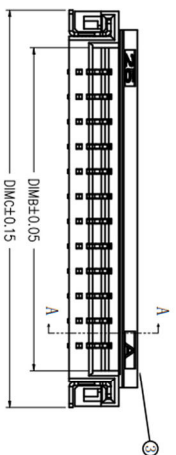
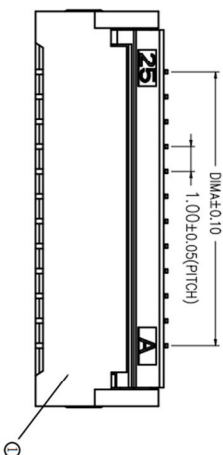


CKT	D1M4	D1M6	D1M8
4	3.00	5.02	8.04
5	4.00	6.02	9.04
6	5.00	7.02	10.04
7	6.00	8.02	11.04
8	7.00	9.02	12.04
9	8.00	10.02	13.04
10	9.00	11.02	14.04
11	10.00	12.02	15.04
12	11.00	13.02	16.04
13	12.00	14.02	17.04
14	13.00	15.02	18.04
15	14.00	16.02	19.04
16	15.00	17.02	20.04
17	16.00	18.02	21.04
18	17.00	19.02	22.04
19	18.00	20.02	23.04
20	19.00	21.02	24.04
21	20.00	22.02	25.04
22	21.00	23.02	26.04
23	22.00	24.02	27.04
24	23.00	25.02	28.04
25	24.00	26.02	29.04
26	25.00	27.02	30.04
27	26.00	28.02	31.04
28	27.00	29.02	32.04
29	28.00	30.02	33.04
30	29.00	31.02	34.04

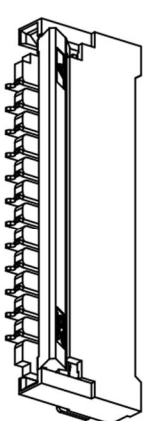

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: $\leq 0.03\Omega$.
5. 绝缘电阻: $\geq 500\text{M}\Omega$.

序号		品名	材质	第一视角		比例	规格型号/ Part No	1. 0-H2. 0后压卧式
①		1. 0后压胶芯 (H2. 0)	LCP UL94V-0 本色	一般公差		1:1	Part No	
②		0. 5后压端子 (H2. 0)	铜合金/表面镀锡 镀金	$>0.5-2$ $>2-5$ >5 以上		± 0.1 ± 0.2 ± 0.3	物料号/ Part No	
③		0. 5后压后盖 (H2. 0)	LCP UL94V-0 黑色	角度		$\pm 1^{\circ}$	TS-Q002***	
④		0. 5后压垫片 (H2. 0)	铜合金/表面镀锡					
备注				设计/Designed		审核/Checked	批准/Approved	
				吴永余		吴东升	何春林	
				标記 處數 更改文件號		簽字 日期		