


规格书

间距(space) : 3.96mm

公差: ± 0.1

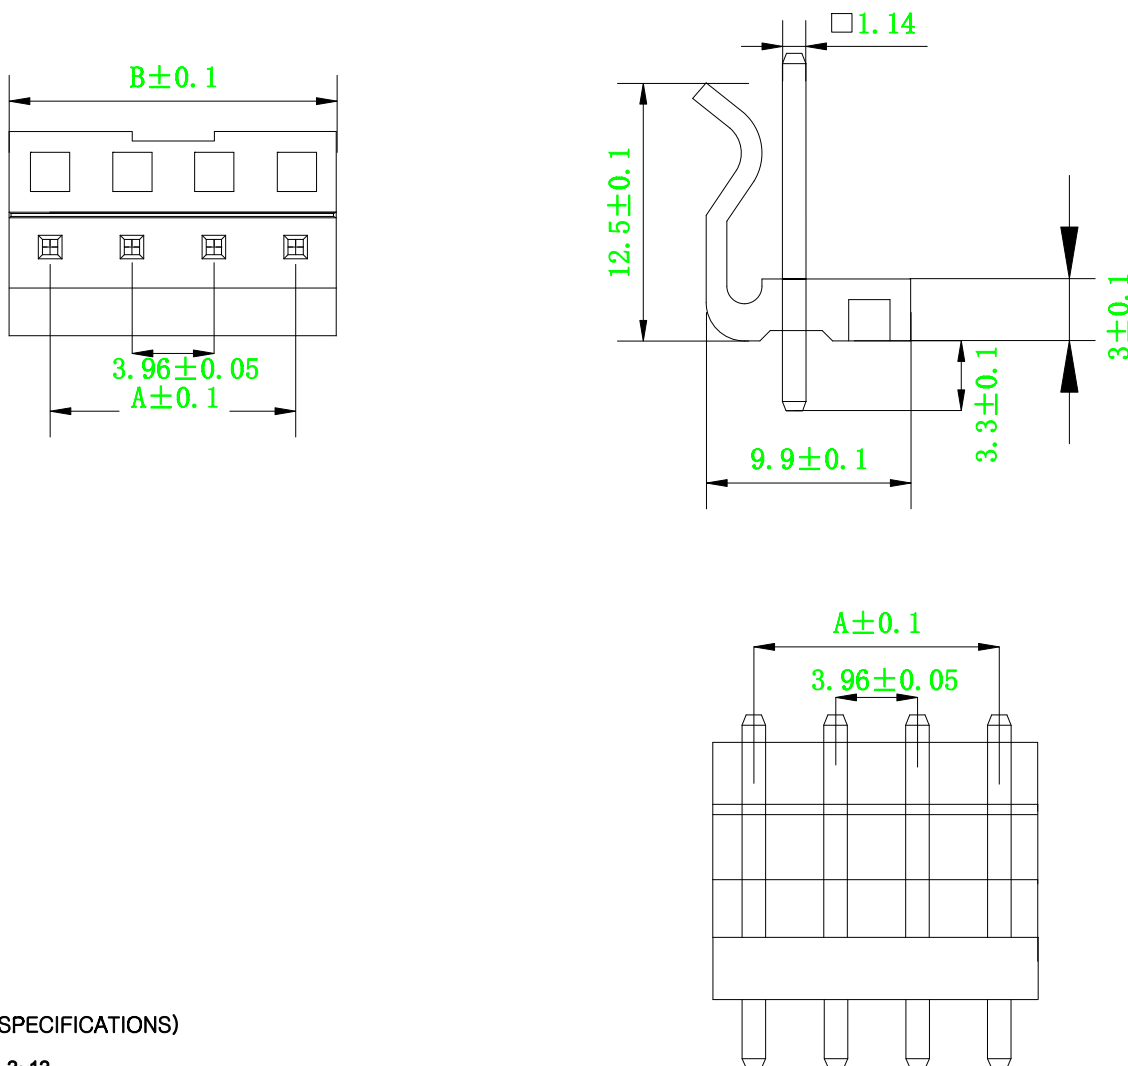

□ 技术参数: (SPECIFICATIONS)

- ◇ 线数 (Poles): 2~12
- ◇ 适用线规 (Applicable wires): AWG24# ~ 18#
- ◇ 适用基板厚度 (Applicable PC board thickness): 1.6mm
- ◇ 温度范围 (Temperature range): -25 C ~ 85 C
- ◇ 额定电压 (Voltage rating): 250V AC/DC
- ◇ 额定电流 (Current rating): 5A
- ◇ 接触电阻 (Contact resistance): $\leq 0.015\Omega$
- ◇ 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- ◇ 耐压 (Withstand voltage): 1200V AC/minute
- ◇ 材料 (Material): (Nylon)66 UL94V-2(0)

线数 poles	型号 Type	尺寸 Dimensions mm	
		A	B
2	3.96-2A	3.96	7.92
3	3.96-3A	7.92	11.88
4	3.96-4A	11.88	15.84
5	3.96-5A	15.84	19.8
6	3.96-6A	19.8	23.76
7	3.96-7A	23.76	27.72
8	3.96-8A	27.72	31.68
9	3.96-9A	31.68	35.64
10	3.96-10A	35.64	39.6
11	3.96-11A	39.6	43.56
12	3.96-12A	43.56	47.52

设计	张 鹏	标准化		产品名称	重量	比例	技术要求
校对		审 定		3.96-2A~12A直针			
审核							
		日期	2022. 6. 1	共 1 页	第 1 页		



温州瀚精电子有限公司
WENZHOU HANJING ELECTRONIC CO., LTD.