

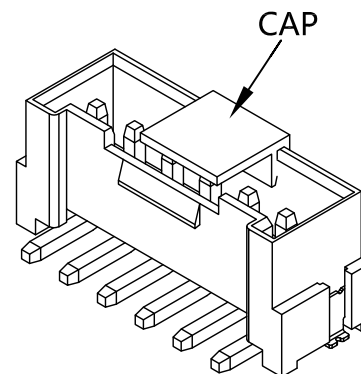


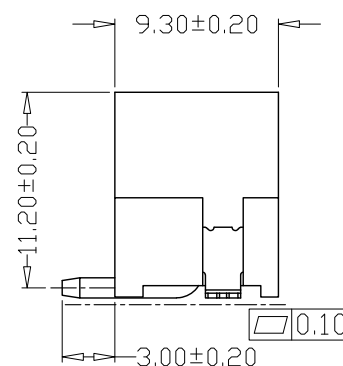

PCB LAYOUT

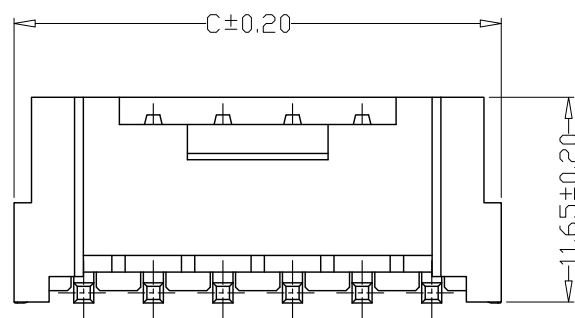

PIN	尺寸 (mm)		
	A	B	C
-02AB	3.96	8.68	11.88
-03AB	7.92	12.64	15.84
-04AB	11.88	16.60	19.80
-05AB	15.84	20.56	23.76
-06AB	19.80	24.52	27.72
-07AB	23.76	28.48	31.68
-08AB	27.72	32.44	35.64
-09AB	31.68	36.40	39.60
-10AB	35.64	40.36	43.56
-11AB	39.60	44.32	47.52
-12AB	43.56	48.28	51.48

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer PA9T, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

GENERAL TOLERANCE		制 图 Mapping		料 号 PART NO.		版 本 REV.		A	
X.±0.25	X.°±2°	审 核 Audit		品 名 TITLE		VH立贴 WAFER SMT TYPE		页 次 SHEET	
.X±0.25	.X°±1°			客 户 料 号 CUTM. NO.					
.XX±0.15	.XX°±0.5°	核 准 Approved							
.XXX±0.10	.XXX°±0.5°	单 位 Units	mm	比 例 SCALE	 温州瀚精电子有限公司 WENZHOU HANJING ELECTRONIC CO., LTD.				

 温州瀚精电子有限公司
WENZHO HANJING ELECTRONIC CO., LTD.