






版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃~+85℃
4、Contact Resistance: 10mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1500V AC/minute
7、Material:Wafer PA9T,UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

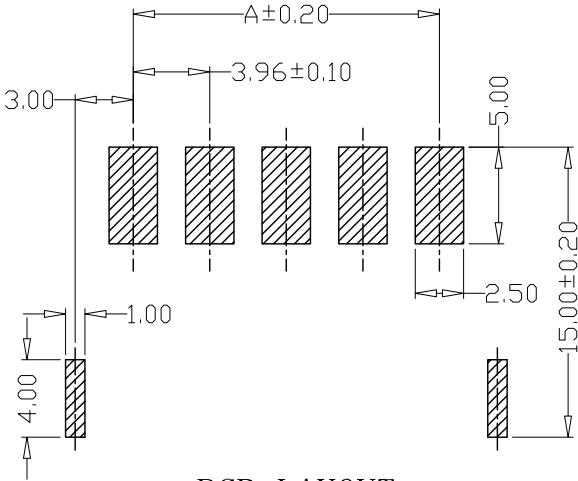

PCB LAYOUT

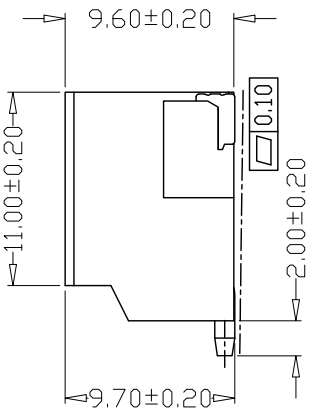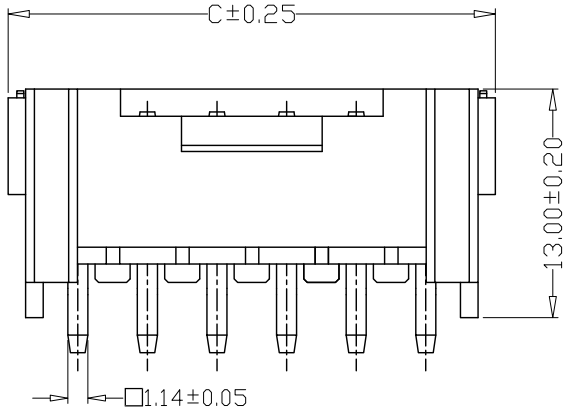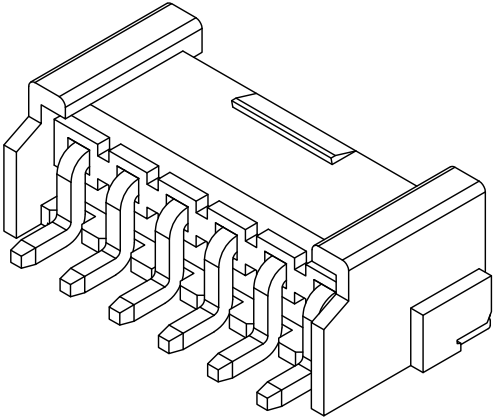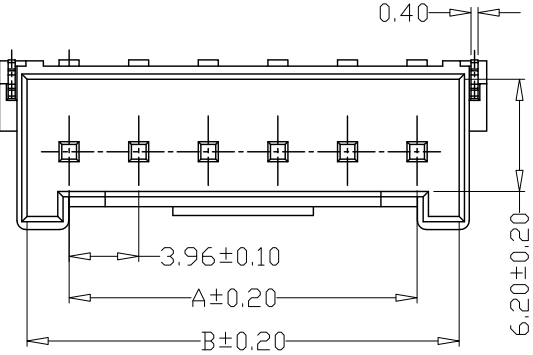

PIN	尺寸 (mm)		
	A	B	C
-02AWB	3.96	8.68	11.88
-03AWB	7.92	12.64	15.84
-04AWB	11.88	16.60	19.80
-05AWB	15.84	20.56	23.76
-06AWB	19.80	24.52	27.72
-07AWB	23.76	28.48	31.68
-08AWB	27.72	32.44	35.64
-09AWB	31.68	36.40	39.60
-10AWB	35.64	40.36	43.56
-11AWB	39.60	44.32	47.52
-12AWB	43.56	48.28	51.48

GENERAL TOLERANCE		制 图 Mapping				料 号 PART NO.	VH卧贴 WAFER SMT TYPE		版 本 REV.	A
X.±0.25	X.°±2°					品 名 TITLE			页 次 SHEET	1/1
.X±0.25	.X°±1°	审 核 Audit				客户料号 CUTM. NO.				
.XX±0.15	.XX°±0.5°									核 准 Approved
.XXX±0.10	.XXX°±0.5°	单 位 Units	mm	比 例 SCALE		 温州瀚精电子有限公司 WENZHOU HANJING ELECTRONIC CO.,LTD.				