
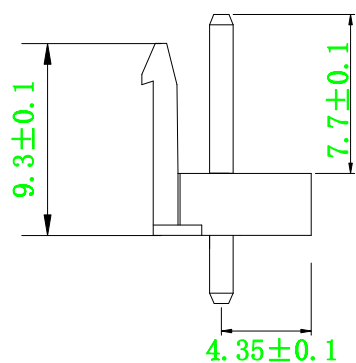
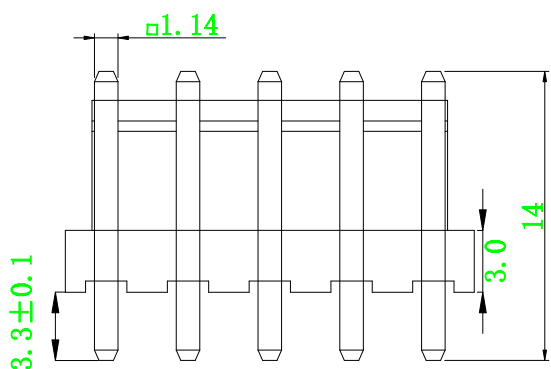
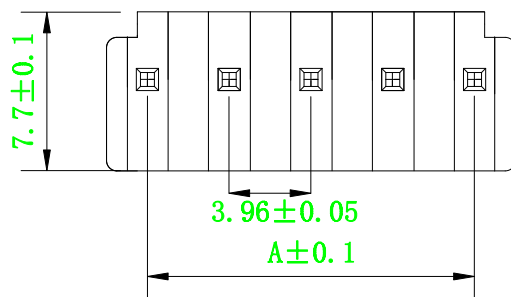



规格书

间距(space) : 3.96mm

公差: ± 0.1

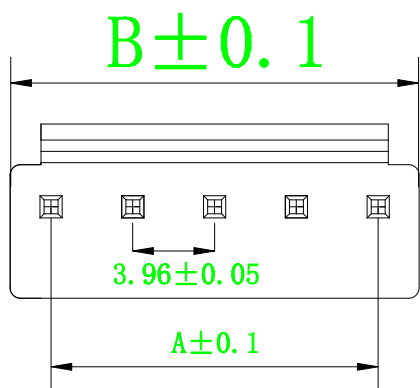

安装尺寸:

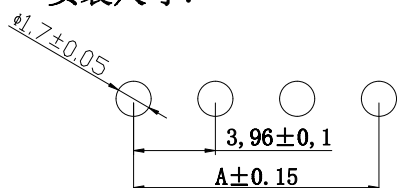

技术参数:

线数 (Poles) : 2~12

适用线规 (Applicable wires) : AWG22#~18#

适用基板厚度 (Applicable PC board thickness) : 1.6mm

温度范围 (Temperature range) : -25°C~85°C

额定电压 (Voltage rating) : 250V.Ac/Dc

额定电流 (Current rating) : 7.5A

接触电阻 (Contact resistance) : $\leq 0.015\Omega$

绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$

耐压 (Withstand voltage) : 1500V.Ac/1min

材料 (Material) :

针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)

线数 poles	型号 Type	尺寸Dimensions mm	
		A	B
2	VH-2A	3.96	7.92
3	VH-3A	7.92	11.88
4	VH-4A	11.88	15.84
5	VH-5A	15.84	19.8
6	VH-6A	19.8	23.76
7	VH-7A	23.76	27.72
8	VH-8A	27.72	31.68
9	VH-9A	31.68	35.64
10	VH-10A	35.64	39.6
11	VH-11A	39.6	43.56
12	VH-12A	43.56	47.52

材料: PA66

设计	吴永余			产品名称	比例	技术要求
校对	张鹏	日期	2022.6.1	VH直针		
				共 1 页	第 1 页	

HJQK 温州瀚精电子有限公司
WENZHOU HANJING ELECTRONIC CO., LTD.