



A										
B										
C										
D										
E										
F										

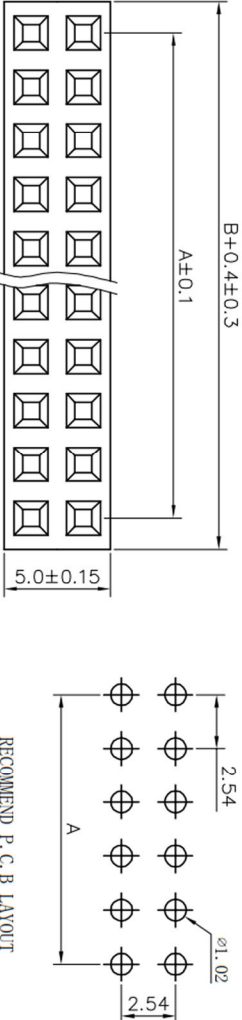

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 240° C for 30-60seconds
(260° C for 5seconds)

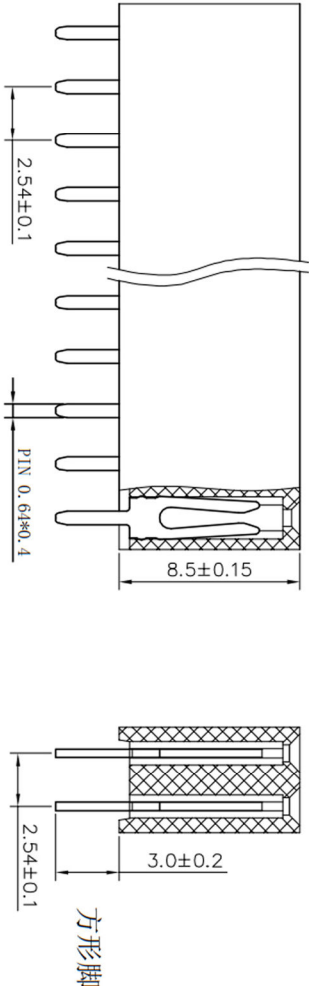

E										
F										

第一视角					比例				
一般公差					规格型号/ Part No				
>0.2-2					1:1				
>2-5					单位				
>5以上					物料号/ Part No				
角度					mm				

设计/Designed	审核/Checked	批准/Approved
吴永余	吴东升	何春林